



TOSOT

Submittal Data:		12,000 BTU/H Wall Mounted Heat- Pump System		
Job Name	Location	Date		
Purchaser	Engineer			
Submitted To	For	<input type="checkbox"/> Reference	<input type="checkbox"/> Approval <input type="checkbox"/> Construction	
Unit Designation	Schedule No.			
GENERAL FEATURES <ul style="list-style-type: none"> - Variable Speed (Inverter) Two-Stage Compressor - Low Ambient Heating (down to -22° F) - WIFI Controls - 7 Indoor Fan Speeds - 4 Way Airflow Operation - Wireless Remote with LCD Display - Copper Tube/Aluminum Fins w/ Acrylic Resin Anti-Corrosion Coating on both ID and OD units - I-FEEL Function - 5 year Limited Parts Warranty, 7 year limited compressor warranty 				
System Ratings		Indoor Unit Data		
Cooling		Fan Motor	Type	Cross-flow
Rated Capacity	12,000 BTU/H		Output Power	60 W
Capacity Range	2,900 -15,354 BTU/H		FLA	0.09 A
Power Input (Max)	1,500 W	Airflow	(Low/High)	235/500 CFM
SEER	30.5	Air Throw	(Max)	29.5 ft
EER	15.3	Sound Level		
Heating at 47° F			Cooling (Low/High)	22/49 dB(A)
Rated Capacity	12,200 BTU/H		Heating (Low/High)	22/49 dB(A)
Capacity Range	3,071 -18,766 BTU/H	Dehumidification		3.0 pt/hr
Power Input (Max)	1,600 W	Outdoor Unit Data		
HSPF	14.0	Compressor	Type	DC Inverter Driven 2-Stage Rotary
COP	3.8		RLA	6.9A
Heating at 17° F		Fan Motor	Output Power	30 W
Rated Capacity	8,100 BTU/H		RLA	0.24 A
Operating Range		Sound Level		53 dB(A)
Cooling	(Max)	129°F(54°C)	Refrigerant Piping Data	
	(Min)	0°F(-18°C)	Gas Pipe Size (OD)	1/2-in
Heating	(Max)	75°F (24°C)	Liquid Pipe Size (OD)	1/4-in
	(Min)	-22°F(-30°C)	Connection Method	Flared
Power Supply			Factory Charge	R410A/49.4 oz
Normal Operational Voltage	208/230 V, 1 Phase, 60 Hz		Additional Charge	0.20 oz/ft
Voltage Range	187 - 253 V		Pre-Charge Length	25-ft
Main Power Wire Size	12-2 AWG		MAX Refrigerant Pipe Length	98-ft
Interconnecting Cable Wire Size	14-4 AWG		MIN Refrigerant Pipe Length	10-ft
MCA	9 A		MAX Refrigerant Pipe Elevation	49-ft
MOCP/Breaker Size	15 A			



SYSTEM FEATURES	
Inverter Type	G10
Ultra Low Frequency Torque Control	Yes
Power Factor Correction	Yes
Compressor Type	High Eff. Two Stage Rotary
Refrigerant Type	R410A
Basepan With Electric Heater	YES
Compressor With Electric Heater	YES
Indoor & Outdoor Fin Coating	Acrylic Resin/Anti-Corrosion
Intelligent Defrosting	YES
Intelligent Preheating	YES
Low Voltage Startup	YES
Memory/Power Failure Recovery	YES
Self Diagnosis	YES
Wired Controller Interface	NO
WIFI Interface Capable	YES
Indoor Fan Type	Crossflow
Multi Fan Speeds	7 Speeds
Indoor Unit Display	YES
Advance Filter	Optional (see Filter Kits)
Auxiliary Electrical Heater	NO
Ventilation (Outdoor Air)	NO
REMOTE CONTROLLER FUNCTIONS	
Auto Mode	YES
Auto Fan	YES
Auto Swing (Horizontal Auto Swing)	YES
Auto Swing - 180°(Vertical Auto Swing)	YES
Clock on Remote Controller	YES
Dry Mode	YES
Dry Anti-Mildew (X-Fan) Mode	YES
Energy Saving Mode	NO
Dirty Filter Alert	NO
Fan Speed Control (7 speeds)	YES
I Feel Function	YES
Privacy Lock on Remote Controller	YES
Quiet Mode	YES
Room Temperature Display	NO
Sleep Mode	YES
4 Sleep Modes Options	YES
Timer Mode	YES
Turbo Mode	YES
Display On/Off Control	YES
Freeze Guard Mode	NO
Display On/Off Control	YES
Freeze Guard Mode	YES
Power Failure Mode	YES

COOLING PERFORMANCE (BtuH)*

Outdoor Ambient Temperature (DB)	Indoor Entering Air Temperatures					
	68°F DB		73°F DB		80°F DB	
	57°FWB		61°FWB		67°FWB	
	TC	SHC	TC	SHC	TC	SHC
0°F	8274	6639	8517	6842	8975	7200
5°F	8903	7142	9165	7361	9657	7746
14°F	10160	8148	10462	8398	11022	8838
23°F	10789	8651	11110	8916	11705	9384
32°F	11418	9154	11758	9435	12387	9930
41°F	12047	9657	12407	9954	13069	10476
50°F	12612	10090	12943	10345	14666	10954
59°F	13241	10593	13591	10864	15348	11500
68°F	14498	11599	14888	11901	16713	12592
77°F	15127	12102	15536	12419	17396	13138
86°F	15756	12605	16184	12938	18078	13684
95°F	15829	12679	16300	13071	17182	13745
104°F	15200	12176	15652	12552	16500	13199
113°F	14571	11673	15004	12034	15817	12653
122°F	13314	10667	13707	10997	14452	11561
129°F	12685	10164	13059	10478	13770	11015

HEATING PERFORMANCE (BtuH)*

Outdoor Ambient Temperature (DB)	Indoor Entering Air Temperatures					
	68°F DB		73°F DB		80°F DB	
	57°FWB		61°FWB		67°FWB	
	TC	SHC	TC	SHC	TC	SHC
-22°F	8589		8556		8533	
-13°F	9760		9724		9698	
-4°F	12200		12155		12123	
0°F	12289		12247		12215	
6°F	13304		13259		13227	
10°F	13743		13697		13664	
16°F	14590		14542		14507	
19°F	14797		14750		14695	
24°F	15658		15606		15548	
32°F	17094		17037		16979	
41°F	18263		18200		18139	
43°F	18410		18359		18297	
47°F	17858		17808		17750	
53°F	17322		17275		17220	
59°F	16023		15980		15927	
64°F	14773		14734		14685	
70°F	13887		13853		13806	
75°F	12915		12884		12740	
78°F	12140		12112		12006	


* Maximum system capacity

TC- Total Capacity (BtuH)


SHC- Sensible Capacity (BtuH)

MINIMUM SPACING REQUIREMENTS

Units: inch (mm)

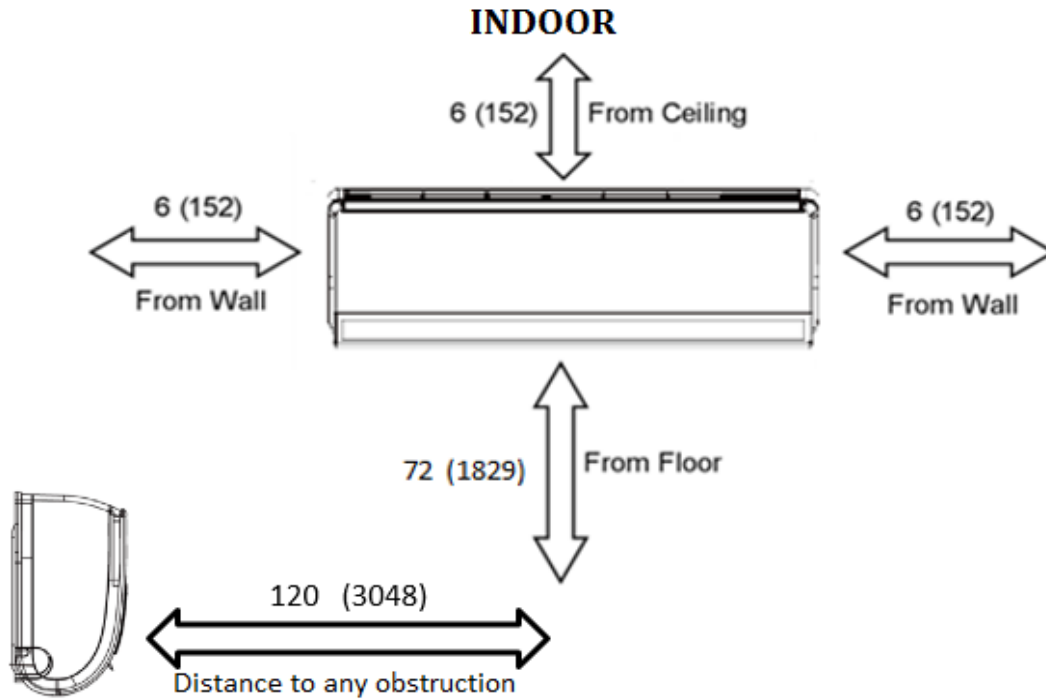

Minimum Outdoor Clearances

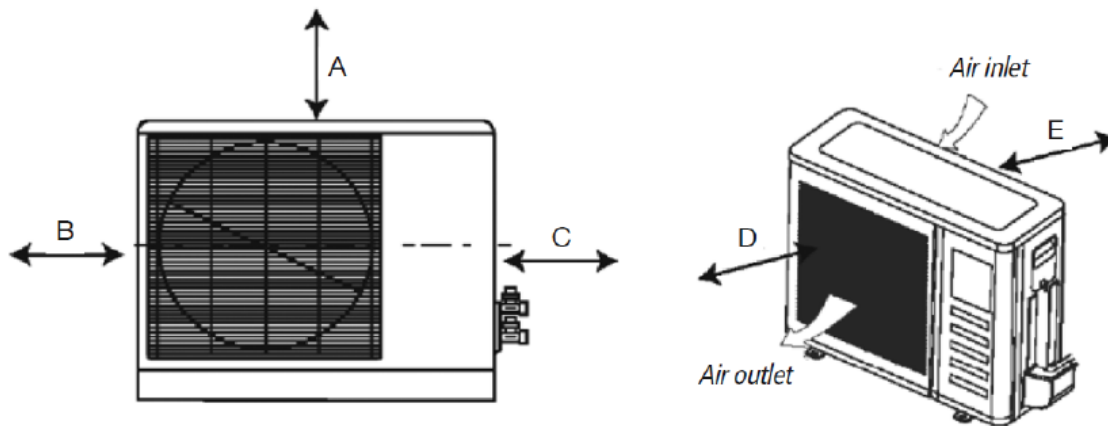

Outdoor Unit	Minimum Distances in (mm)
A	20 (500)
B	12 (305)
C	20 (500)
D	80 (2032)
E	12 (305)



DIMENSIONAL SPECIFICATIONS

TW12HQ3D6D


INDOOR UNIT DIMENSIONS

Units: inch

Model No: TW12HQ3D6DI

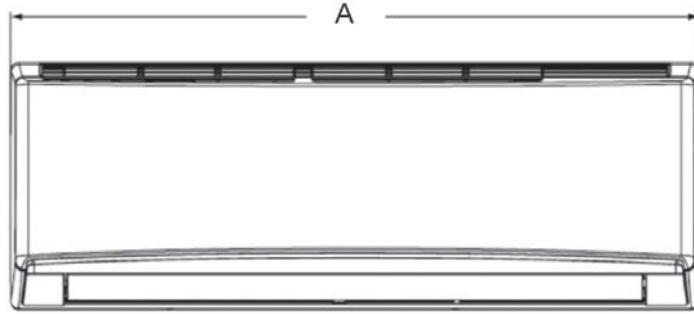

Dimensions	
A	38.2
B	11.8
C	8.9

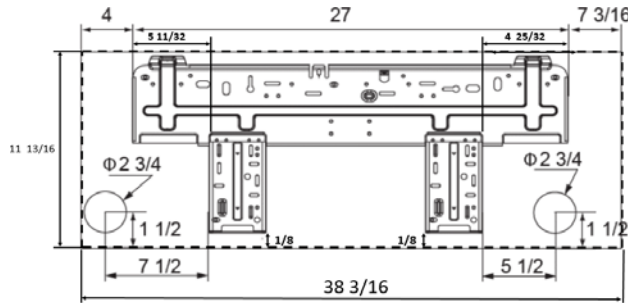




Weight (Net/Shipping) 29.8/36.4 LBS

Liquid Line Valve	1/4-in OD Flared
Gas Line Valve	1/2-in OD Flared
Drain Connector	5/8-in OD

OUTDOOR UNIT DIMENSIONS

Units: inch

Model No: TW12HQ3D6DO

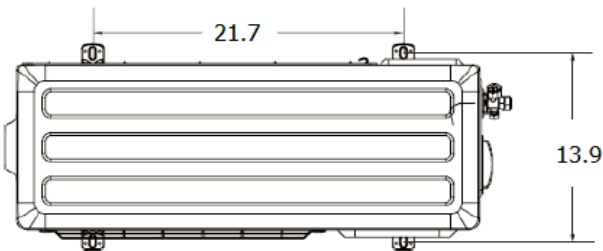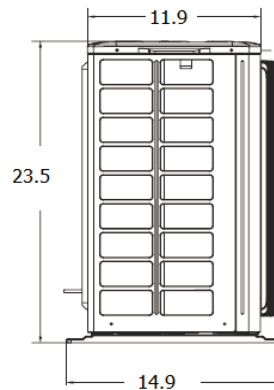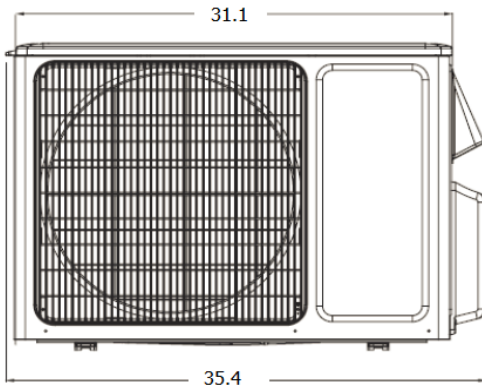

Liquid Line Valve	1/4-in OD Flared
Gas Line Valve	1/2-in OD Flared

Weight (Net/Shipping) 99.2/105.8 LBS

Notes:

1. Recommended Interconnecting Cable Type 14 AWG 4 Stranded Copper Conductors THHN 600V Wire
2. Power wiring cable size must comply with applicable national and local codes.
3. Test conditions are based on AHRI 210/240.